

Product No. **6046-800-10**  
 S No.  
 EAN No. **7312906046802**



## Classic Glob 200 LED

The Classic series is an old favourite of our assortment. Ideal in most areas where functionality and timeless design are the key words. Classic is available in different combinations with a matt opal, shiny opal or a clear glass shade.

### Specification

Base material	
Light source	LED module, max 10W **
Luminaire lm	
LED module lm	900 lm
Color temp.	3000K
MacAdam	3
Lifetime	50 000 h
Ra (CRI)	Min 80
Dimmable	Yes
Voltage	230V
Installation	Ceiling/wall
Base colour	White NCS S 1502-G50Y
Safety class	I
Protection class	IP44
Energy class	A+
T <sub>a</sub>	
Height	216
Diameter	200
Glass	Matt opal
Thread	123,5 mm
Weight	1,59 kg
Design	Ifö Electric

### Installation

Insert the mains supply cable through the bottom inlet. Fix the light fitting to wall or ceiling with suitable screws. Connect the leads to the terminals and fasten the LED module. Fasten the shade by turning it clockwise. Make sure the gasket between the glass and base is in place.

### Technical information

Silicone gasket between glass and base. Four Ø 5mm holes for installation. Two holes CC measurement 70 mm, alternatively two hidden holes CC measurement 60-66 mm. Bottom inlet suitable for two leads. Terminal for connection of max 3 x 2,5 mm<sup>2</sup>. Bridging is possible. Bottom inlet, four knock out openings.

### Dimmer


Vadsbo LD220, 1-10 pc  
 Vadsbo LD220WCM, 1-10 pc  
 Vadsbo LD200KRON, 1-10 pc  
 Vadsbo VD200, 1-10 pc  
 Schneider CCT99100, 1-10 pc  
 Schneider SBD420RCRL, 1-4 pc  
 Schneider SBD630RC, 1-6 pc

### Maintenance

Switch off the power to the fixture. Remove the shade and clean it. Do not use cleaning agents containing solvents. Change the LED module if necessary. Check the gasket and change it if necessary. Replace the shade.

### Spare parts

Gasket: 02789, 79 057 04  
 Shade: 1-6141-1, 7906090

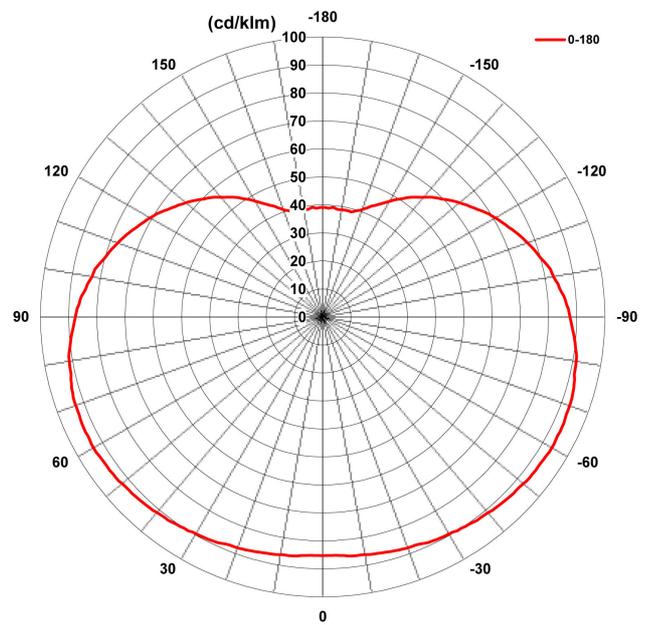

*\*\* The device must under no circumstances be connected to the same phase as a magnetic ballast or other older fluorescent luminaires as these luminaires can generate overvoltage transients outside of EU regulatory standards when switched off or on. The luminaire can permanently damage or completely cease to function when connected.*

*If the luminaire is modified the person responsible for the modification shall be considered manufacturer. Subject to errors in text. We reserve the right to change the technical specifications (without notice).*

