


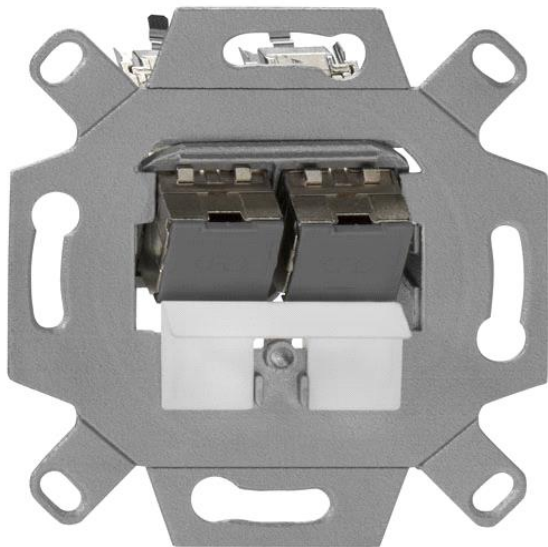

Product Features

10 Gigabit-modular jack, shielded, 2-way, flush mounting with 2 modules, break off mounting ring, suitable for the design wall plates of all well-known manufacturer

- for use in 10-Gigabit-Ethernet-Networks (transmission bandwidth 500 MHz)
 - RJ45 - openings
 - suitable for the TAE-design wall plates of all well-known manufacturer (Berker, Busch-Jäger, GIRA, JUNG, Merten etc.)
- performance universal modular jack:
- 10GB-universal module, shielded
 - for use in 10-Gigabit-Ethernet-Networks (transmission bandwidth 500 MHz)
 - 1 x RJ45 - opening
 - for standard keystone cutouts (14,8 x 19,3mm)
 - zinc diecast design
 - nickel-plated housing
 - 360° strain relief and shielding
 - suitable for Cat.6 and Cat.7 cable (Ø 6-10mm)
 - massive wires: IDC-terminals for one wire 0,51 - 0,64 mm Ø, AWG 24-22, maximum number of connections > 10-times
 - stranded wires: IDC-terminals for one wire Leiter 0,13-0,22 mm Ø AWG 26 (PE-Foamskin), AWG 24 (PE-solid), outer diameter 0,9-1,1 mm (PE)
 - 1 wire each contact, max. number of connections > 10-times
 - bend radius optimized cable entry (30°)
 - defined grounding via flat plug possible
 - mounting without any special tools
 - built-in dust protection (removeable)
 - colour code T568A and T568B according to EIA/TIA 568 A and B
 - suitable for PoE++ / 4PPOE according to IEEE 802.3bt
 - UPOE conform
 - HDBaseT conform
 - with mounting adapter angled/straight suitable for the TAE-design wall plates of all well-known manufacturer (Berker, Busch-Jäger, GIRA, JUNG, Merten etc.)
 - according to the following standards:
 - ISO/IEC 11801, Cat.6A, shielded
 - DIN EN 50173-1, Cat.6A, shielded
 - ANSI TIA/EIA-568-C.2 Category 6A
 - DIN IEC 60603-7-51, 500 MHz, shielded,
 - life > 750 cycles
 - RJ11/12-protected against mismatching
 - GHMT certified

Features		
General		
Design capability		Yes
shielded		Yes
Classification		Cat.6A iso
PoweroverEthernet		Yes
Protection class IP		20
Halogen Free		Yes
Statistical goods number		85369010
Country of manufacture		DE
GTIN (EAN)		4043921666661
Mounting types		
flush-mounted		Yes
surface-mounted		Yes
Dimensions/Weights without packaging		
Length mm		80
Width mm		80
Height mm		41
Net weight piece kg		0,086
Certifications		
WEEE		Yes
GHMT		Yes
CE		Yes
RoHS conform		Yes
Logistics Information		
Packaging		box
Packaging unit Quantity		10
Packaging unit Weight kg		1,362
Packaging unit Width mm		178
Packaging unit Height mm		87
Packaging unit Depth mm		312
References		
Accessories		10010051, 13910052, 13910053, 23510002, 23510003, 23510004, 23510005, 23510006, 23510007
Similar article		136104030

